

CWP 96



DATA SHEET

Ducted Water Cooled R410A Packaged Air Conditioners

Dimensions (mm)

CWP 96

Not to Scale

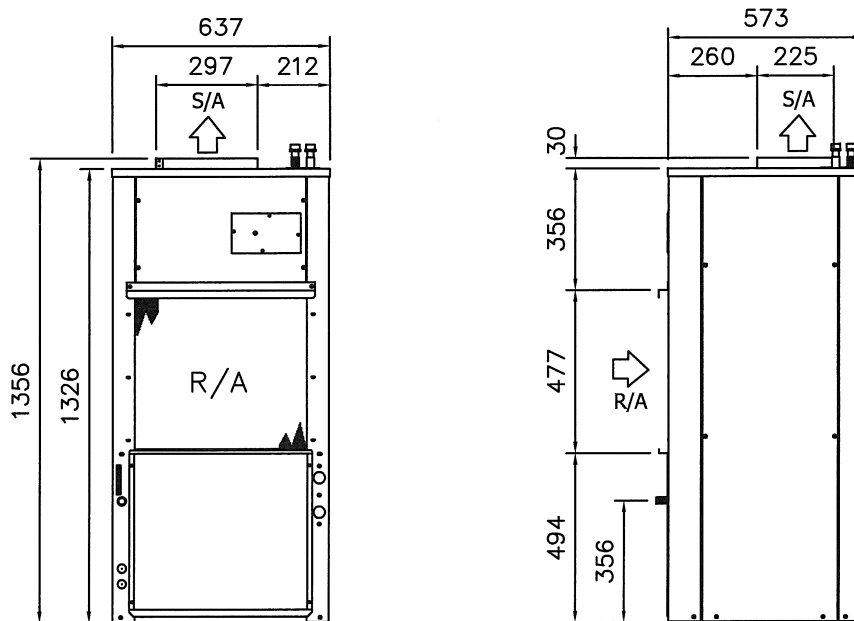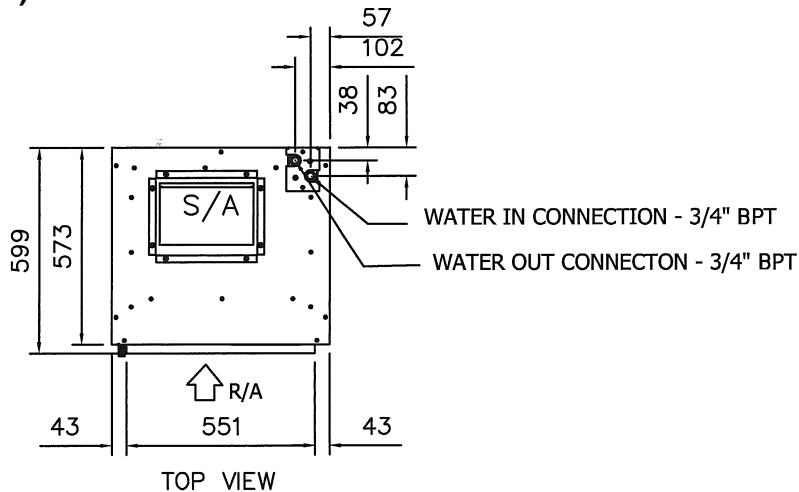

COOLING CAPACITY (kW)

AIR FLOW RATE l/s	COIL E.A.T.		LEAVING WATER TEMPERATURE (L.W.T.) °C																							
	W.B. °C	D.B. °C	25				30				35				40				45				50			
			T	S	FL	HR	T	S	FL	HR	T	S	FL	HR	T	S	FL	HR	T	S	FL	HR				
578	17	23	10.6	7.3	0.6	12.8	10.1	7.2	0.6	12.4	9.7	6.9	0.6	11.9	9.3	6.8	0.6	11.5	8.9	6.6	0.6	11.1	8.4	6.4	0.6	10.6
	19	27	11.1	8.4	0.6	13.4	10.7	8.2	0.6	13.0	10.3	8.0	0.6	12.6	9.9	7.8	0.6	12.1	9.5	7.6	0.6	11.7	9.1	7.4	0.6	11.3
	21	31	11.8	10.0	0.6	14.0	11.3	9.8	0.6	13.6	10.9	9.6	0.6	13.2	10.5	9.4	0.6	12.8	10.1	9.2	0.6	12.4	9.7	8.9	0.6	11.9

T = Total Capacity (kW)
FL = Water Flow (l/s)

S = Sensible Capacity (kW)
E.A.T. = Entering Air Temperature (°C)

HR = Heat Rejection (kW)
○ = Nominal Capacity (kW)

NOTE: Capacities are **gross** and do not include allowance for fan motor heat loss. For fan motor heat loss refer to Air Handling Performance. Water flow and cooling capacity based on 5 °C water temp. difference.


HEATING CAPACITY (kW) CWP***R** Reverse Cycle version

CWP 96

MODEL	WATER FLOW RATE l/s	COIL E.A.T. D.B. °C	LEAVING WATER TEMPERATURE (L.W.T.) °C											
			12.5				15.5				18.5			
			HC	HAb	EWT	INPT	HC	HAb	EWT	INPT	HC	HAb	EWT	INPT
CWP 96R	0.6	18	9.1	6.7	15.9	2.1	9.7	7.2	19.2	2.1	10.4	7.9	22.5	2.2
		21	9.0	6.5	15.9	2.2	9.7	7.1	19.2	2.3	10.4	7.7	22.4	2.4
		25	9.0	6.3	15.9	2.4	9.7	6.9	19.2	2.5	10.4	7.5	22.4	2.6

HC = Heating Capacity (kW)
HAb = Heat Absorbed (kW)
○ = Nominal Capacity (kW)
EWT = Entering Water Temperature (°C) (Minimum required 17°C)
INPT = Compressor Input (kW)
E.A.T. = Entering Air Temperature (°C)

AIR HANDLING PERFORMANCE Without Filter

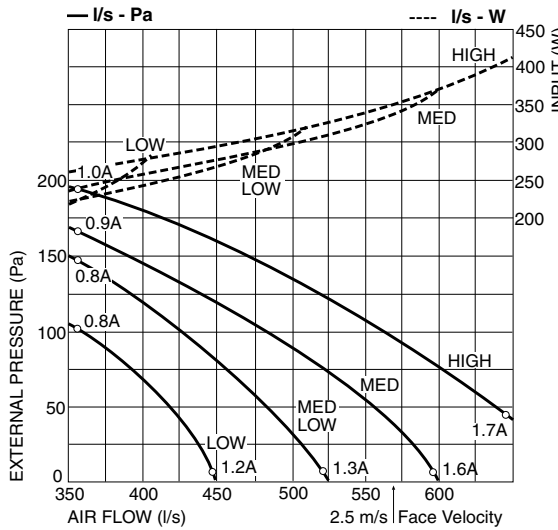

EU2 rated Filter	Coil Face Velocity	1.5 m/s	2.0 m/s
	Pressure Loss	18 Pa	30 Pa

QUICK REFERENCE

Electrical Input (Cooling)	2.84 kW
E.E.R. (Cooling)	3.51
Running Amps (Total)	12.85
Fan Motor Full Load Amps	1.73
Electrical Supply Required	1 ph. 220-240V ±10% a.c. 50 Hz
Recom'd External Fuse Size	25 A
Refrigerant	HFC-410A (R410A)
Minimum Water Flow	0.62 l/s
Water Coil Pressure Drop	41.4 kPa (6 psi)
Filter (EU2 rated)	fitted
Electric Heat Option	4 kW

Note

- In tropical (high humidity) conditions care must be taken to select an air flow which gives a suitable coil face air velocity, to prevent water carry over.
- For applications with low resistance be sure not to exceed the fan motor full load amps.
- Applications using full or high proportions of fresh air should be referred to **temperzone** engineering office to establish the correct selection of units.

SOUND LEVELS

Note: SPL measured to JIS 8616 (1m from source in an anechoic chamber)

SUPPLY AIR OUTLET

MODEL	FAN SPEED	AIR FLOW l/s	SOUND PRESSURE LEVELS (SPL) dB(A)	SOUND POWER LEVELS (SWL) dB						
				SWL dB(A)	OCTAVE BAND FREQ. Hz					
					125	250	500	1 k	2 k	4 k
CWP 96	LOW	365	59	55	55	59	51	48	43	
	MED/LOW	455	63	59	58	62	57	55	51	
	MED	570	67	62	61	67	62	59	55	
	HIGH	665	70	64	62	68	67	61	57	

Sound Pressure Levels (SPL) Within A Room

Deduct the room absorption effect below from the Sound Power Levels (SWL) above to obtain Sound Pressure Levels within a room. Note: Occupant at least 1.5 m from sound source.

ROOM TYPE	OCTAVE BAND FREQ. Hz					
	125	250	500	1k	2k	4k
	ROOM ABSORPTION EFFECT					
SOFT	4	8	11	11	11	11
MEDIUM	3	7	8	9	9	9
HARD	0	1	3	4	4	5

NOTE

The manufacturer reserves the right to change specifications at any time without notice or obligation. Certified data available on request.