


Ducted Packaged Roof Top Air Conditioners

Product Review OPA-RK Series



Extra Long Life
Epoxy Coated Outdoor Coil

Nominal Cooling Capacity
10.6 kW – 137 kW

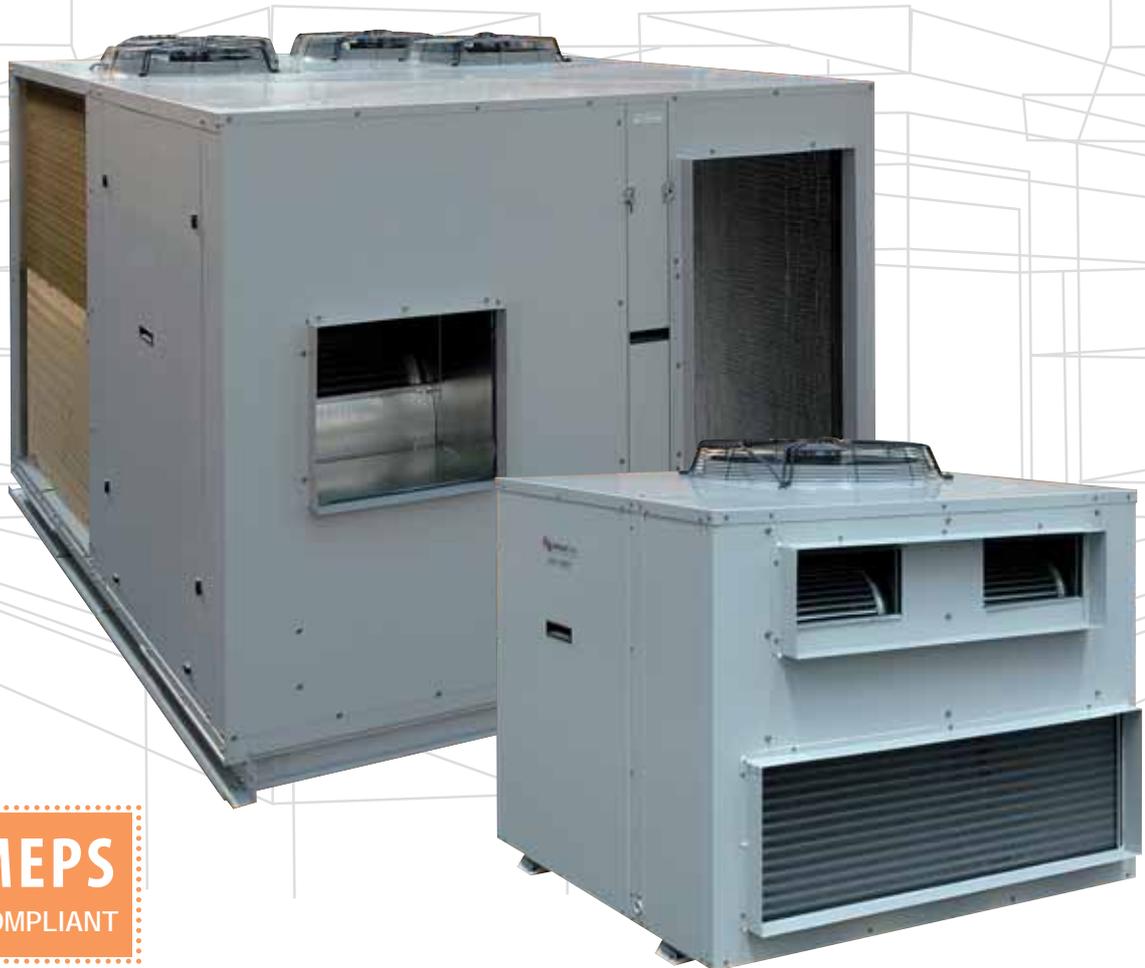

MEPS
COMPLIANT

INVERTER
MODEL

diGital
MODELS

OPA-RK SERIES - DUCTED PACKAGED ROOF TOP AIR CONDITIONERS

GENERAL

The OPA Series Roof Top air conditioners have been conceived from the start as reverse cycle (heat pump) packaged systems – designed to be efficient both when heating and cooling.

TEMPERZONE LIMITED

temperzone is one of Australasia's largest manufacturers of reverse cycle packaged air conditioners. The company has been supplying units to the commercial and industrial markets for over 35 years. Manufacturing facilities are located in New Zealand and Australia.

temperzone's mission is to provide the most competitively priced, reliable and efficient air conditioning equipment available to the international market.

APPLICATIONS

Ducted packaged systems are unobtrusive, quiet, and designed to provide year round comfort – warming in Winter and cooling in Summer. **temperzone's** wide product range offers a unit of performance capacity to suit small to large packaged air conditioner applications, e.g. offices, shops, motels, fast food outlets, restaurants, petrol stations, open plan office and work spaces, supermarkets, shopping malls and auditoriums.

temperzone ducted systems are particularly suitable for rooms with suspended tile ceilings. Not only is valuable wall space preserved, but also the conditioned air can be ducted to the parts of the room where it is most needed.

OPA units are suited to high static pressure applications where large volume spaces are to be air conditioned. Long pipe and duct runs are possible enabling greater installation flexibility.

This range of units have been developed to meet the needs of typical applications. Should you have special requirements, such as higher air flows or greater sensible duty units contact your nearest **temperzone** representative. **temperzone** engineers have extensive experience in designing air conditioning equipment for specific applications.

FEATURES

Refrigerant R410A. Each system uses refrigerant R410A which is deemed to have zero ozone depletion potential.

Economy. Larger models (refer table) feature the flexibility and economy of two or more stage operation. Compressors are progressively switched on only as they are needed. This has the added advantage of lowering start-up current.

Variable Capacity Compressors. 'Digital' or 'inverter' systems include a digital or inverter scroll compressor, plus a conventional scroll compressor on twin systems. Each digital model/version provides a variable capacity ability that enables closer control of room temperature. With 'Digitals' this is achieved by avoiding on/off cycling of the compressor. These compressors have proven very reliable because of their design simplicity. Electrical harmonic noise is very low. 'Inverter' variable capacity is achieved by changing the speed of the compressor. Higher part load efficiency is achieved with this type of compressor, i.e. less power usage.

Efficient. These reverse cycle (heat pump) air conditioners provide one of the most efficient forms of heating you can invest in. For every 1 kW of power consumed, up to 3 kW of heat is generated. Each outdoor unit incorporates high efficiency scroll or rotary compressor/s. Heat exchange coils use inner grooved (rifled) tube for better heat transfer. High efficiency EC motors are used in some models.

Performance. These systems have been designed and tested to perform in ambient conditions as low as -5°C and as high as 50°C. Models with EC motors can be controlled

by either a 0-10V DC signal or High/Med/Low fan speed. EC Plug fan models have high static performance. The larger indoor units have belt driven fans for even finer tuning.

Durable. **temperzone** packaged systems are built tough to withstand all weathers. Their durable construction ensures a long life and excellent return on your investment.

The outdoor air coils' aluminium fins are epoxy coated for extra protection in corrosive environments, e.g. salt laden sea air. Cabinets are constructed from high grade galvanised steel - polyester powder coated (grey) for all weather protection. External fasteners are stainless steel. Corrosion resistant drain trays are also included. Fan motor bearings are sealed for life so as not to incur regular maintenance.

Insulation. Indoor air sections are generously insulated to reduce condensation and contain noise.

Self Diagnostics. Unit's include a controller (OUC) that has a display of LEDs to indicate faults and running conditions. A general fault indicator is included for interface to external systems.

Safety. The refrigeration systems includes a number of protection facilities, including: HP and loss of refrigerant indication, anti rapid cycle timers, frost protection, circuit breaker control circuits, electronic de-ice switch, crankcase heaters and 24 V control.

Configurations. Two versions are available for models OPA 242RK – OPA 1370RK :

1. Horizontal supply/return air with box mounting channel, or
 2. Downward supply air with box mounting channel.
- Models OPA 116RK–186RK are all horizontal configuration.

OPA 116RKY – OPA 186RKY use EC motor indoor air fans, OPA 242 has an EC plug fan, while OPA 280RK – OPA 1370RK use belt drive fans with adjustable pulleys to match the supply air/ static pressure requirements.

Economiser Option. If the outdoor air temperature or enthalpy is below that of the return air, the compressor stops, a fresh air damper opens and the return air damper closes. Operating costs are reduced as free cooling is obtained. Fresh air dampers close to a minimum setting and return air dampers open before normal compressor operation resumes.

Fresh Air Introduction. An optional fresh air damper is available for most models (refer table). For applications using high proportions of fresh air (50%+) a limiting thermostat will be custom fitted to stop the compressor/s when the air-on coil temperature is too low (18°C minimum).

User Friendly. Two room temperature controllers are available - refer options below. Both controllers have been designed to maintain a high level of comfort for room occupants. Emphasis has been placed on providing controls that are easy to use — despite the sophisticated microprocessor system that runs it. Use of the Auto and Timer function settings allows you to "set it and forget it".

Peace of Mind. The manufacturer operates a quality management system that conforms to AS/NZS ISO 9001: 2008. **temperzone** products have been chosen, against worldwide competition, for use in some of the most exclusive projects — chosen because of their proven efficiency, durability, performance, reliability and value.

OPTIONS

- Pleated filters, 50mm thick on OPA 242 - 960.
- SAT Controller Kits for non-digital models.
- T2T-100 Room Thermostat Controller for all models including UC6 or UC7 Controller (incl. digitals).
- Single digital compressor replacement for multiple compressor systems.


new diGital models!

SECRETS OF THE SCROLL

Introducing one of the first compressors to deliver a capacity range from 10% to 100% without the use of inverters.

Digital compressors ensure high efficiency through a unique feature termed axial compliance. This allows the fixed scroll to move incrementally in the axial direction to ensure that fixed and orbiting scrolls are always loaded together with optimal force.

With 70% fewer moving parts, digital compressors deliver enhanced performance with reliable and uncomplicated design.

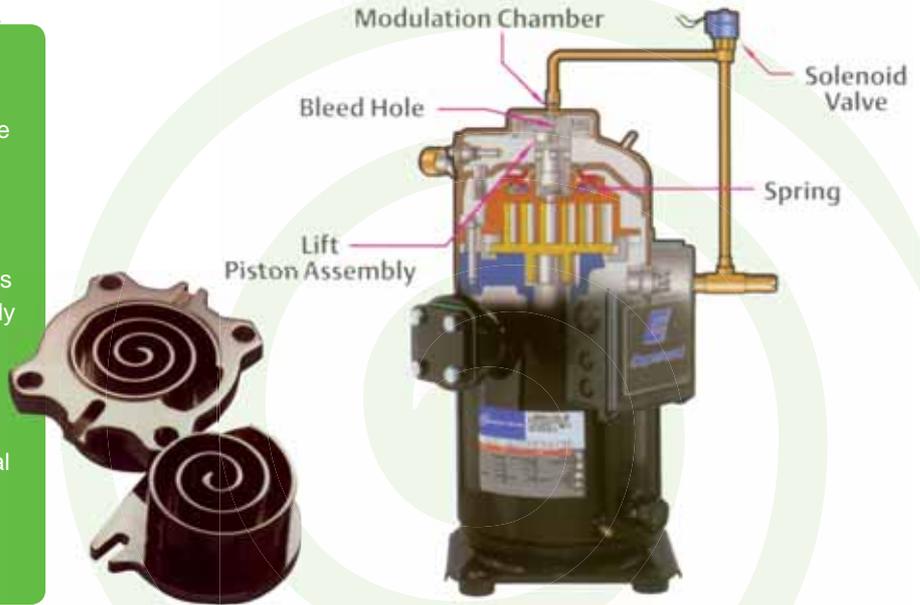

Extended Capability. Digitals are particularly suitable for applications requiring full or high proportions of fresh air, VAV, close control and supply air temperature control.

Control Option. The compressor is controlled variably by a 0–10 volt DC signal that can be supplied either by a BMS system, a sophisticated controller or temperzone's optional TZT-100 Controller.



DIGITAL MODELS

Model		OPA 186G	OPA 201G
Nominal Cooling Capacity *1	kW	18.6	20.0
Net Cooling Capacity	kW	18.2	19.7
EER / AEER (cooling)		3.17 / 3.15	3.14 / 3.32
Heating Capacity *2	kW	16.2	18.1
COP / ACOP (heating)		3.45 / 3.43	3.34 / 3.32
Supply Air Flow (nominal)	l/s	1000	1100
Sound Pressure Level (SPL) *3	dB(A)	59	59
Sound Power Level (SWL) *4	dB(A)	75	75
Power Supply *5		400—415 V a.c. 50 Hz	
Running Amps (Total System)	A	15 / 10 / 10	13 / 9 / 9
Max. Running Amps (Total System)	A/ph.	24	24
Dimensions :	Width	mm	1200
	Depth	mm	1160
	Height	mm	1070
Weight	kg	214	265
Features *7		a g v w	a g v w

*7 Key to Features:

a – 24 volt control

b – Twin compressor system (twin circuit) - enables staging and low start-up current

c – Fresh air damper option

g – Digital compressor (single)

u – Downward supply/return air c/w box mounting channel option

v – Belt drive indoor fan

w – Optional TZT-100 Controller

z – Economiser option

DUCTED PACKAGED ROOF TOP SYSTEMS

Specifications Overview

NON DIGITAL MODELS



Model	OPA 100 ⁶	OPA 116	OPA 161	OPA 186	OPA 201	OPA 242	OPA 294	OPA 296	OPA 340		
Nominal Cooling Capacity* ¹	kW	10.6	11.6	16.1	18.6	20.0	24.2	29.5	29.7	34.0	
Net Cooling Capacity	kW	10.42	11.30	15.60	18.16	18.8	22.34	28.3	29.2	32.1	
EER / AEER (cooling)		2.80 / 2.78	3.35 / 3.33	3.24 / 3.23	3.30 / 3.28	3.20 / 3.19	3.19 / 3.17	3.21 / 3.22	3.22 / 3.20	3.31 / 3.29	
Heating Capacity * ²	kW	10.7	10.8	14.4	16.7	18.75	22.2	27.2	28.1	30.7	
COP / ACOP (heating)		TBA	3.58 / 3.56	3.52 / 3.50	3.52 / 3.50	3.55 / 3.53	3.44 / 3.42	3.72 / 3.70	3.17 / 3.15	3.66 / 3.64	
Supply Air Flow (nominal)	l/s	575	650	815	1000	1100	1400	1600	1700	1800	
Sound Pressure Level (SPL)* ³	dB(A)	49	55	55	59	59	62	57	65	T.B.A	
Sound Power Level (SWL)* ⁴	dB(A)	65	71	71	75	75	78	73	81	T.B.A	
Power Supply * ⁵		400—415 V a. c. 50 Hz									
Running Amps (Total System)	A	7 / 5 / 6	9 / 5 / 5	11 / 7 / 7	12 / 8 / 8	13 / 9 / 8	17 / 14 / 13	18 / 15 / 15	14 / 16 / 13	17 / 20 / 17	
Recommended Ext. Protection	A/ph.	25	T.B.A	T.B.A	T.B.A	T.B.A	T.B.A	32	T.B.A	T.B.A	
Dimensions :	Length	mm	1160	1200	1200	1200	1200	1565	1670	1670	2058
	Depth	mm	1050	1100	1160	1160	1230	1545	1490	1490	1625
	Height	mm	910	915	1070	1070	1175	1370	1500	1500	1500
Weight	kg	160	193	225	235	270	443	516	490	631	
Features * ⁷		e	ay	ay	ay	ay	abcupvz	abcuvz	acpfuwyz	abcuvvz	



Model	OPA 370	OPA 465	OPA 550	OPA 700	OPA 800	OPA 850	OPA 960	OPA 1370		
Nominal Cooling Capacity* ¹	kW	39.1	46.7	56.1	69.6	78.7	85.1	96.0	137.0	
Net Cooling Capacity	kW	36.9	44.6	53.9	66.8	74.2	80.09	87.90	127.7	
EER / AEER (cooling)		3.23 / 3.22	2.96 / TBA	3.05 / 3.04	3.17 / TBA	2.99 / TBA	3.04 / TBA	2.80 / TBA	2.90 / TBA	
Heating Capacity* ²	kW	35.6	43.5	49.5	67.4	70.7	83.5	90.0	130.0	
COP / ACOP (heating)		T.B.A	T.B.A	3.30 / 3.29	T.B.A	T.B.A	T.B.A	T.B.A	T.B.A	
Supply Air Flow (nominal)	l/s	2100	2500	2800	3700	4250	4200	5200	7500	
Sound Pressure Level (SPL)* ³	dB(A)	65	62	68	64	66	66	67	70	
Sound Power Level (SWL)* ⁴	dB(A)	81	78	84	82	82	84	85	86	
Power Supply * ⁵		400—415 V a. c. 50 Hz								
Running Amps (Total System)	A	24 / 20 / 20	32 / 27 / 27	39 / 30 / 29	43 / 36 / 37	50 / 40 / 40	47.5 / ph.	55 / ph.	82 / 87 / 87	
Recommended Ext. Protection	A/ph.	50	50	80	100	120	100	120	125	
Dimensions :	Length	mm	1970	2225	2225	2990	2990	2790	2790	4668
	Depth	mm	1685	1950	1950	2240	2240	2150	2150	2425
	Height	mm	1555	1635	1750	1905	1905	1860	1860	2330
Weight	kg	662	800	851	1234	1234	1162	1233	2297	
Features * ⁷		abcuvz	abcuvz	abcuvz	abcuvvz	abcuvvz	abcuvz	abcuvz	abcuvvz	

*⁷Key to Features:

a – 24 volt control
 b – Twin compressor system (twin circuit)
 enables staging and low start-up current
 c – Fresh air damper option
 e – Electric Heat Kit option
 p – Plug fan c/w EC motor

f – Inverter compressor (single)
 u – Downward supply/return air c/w box mounting channel option
 v – Belt drive indoor fan
 w – Optional TZT-100 Controller
 y – EC Motor
 z – Economiser option

Notes

Filters are optional. Refer to separate Technical Data pamphlets for performance data under a range of conditions.

*1 Nominal Cooling Capacity at AS/NZS 3823 conditions: Indoor Entering Air Temperature 27°C D.B., 19°C W.B.;
Outdoor Entering Air Temperature 35°C D.B.

Net Cooling Capacity figures at AS/NZS 3823 include an allowance for fan motor heat loss.

*2 Nominal Heating Capacity at AS/NZS 3823 conditions: Indoor Entering Air Temperature 21°C D.B.;
Outdoor Entering Air Temperature 7°C D.B., 6°C W.B.

*3 Radiated SPL at 3 m and at nominal air flow.

*4 Supply air outlet at nominal air flow.

*5 Voltage fluctuation limits: 342 – 436 V.

*6 OPA 100 not available in Australia.

*6 Key to Features:

- a – 24 volt control
- b – Twin compressor system (twin circuit) - enables staging and low start-up current
- c – Fresh air damper option
- g – Digital compressor (single)
- f – Inverter compressor (single)
- p – Plug fan c/w EC motor
- u – Downward supply/return air c/w box mounting channel option
- v – Belt drive indoor fan
- w – Optional TZT-100 Controller
- y – EC indoor air fan motor
- z – Economiser option

NOMENCLATURE

Nomenclature

e.g.	O	P	A	4	6	5	R	K	T	B
	Series			Size			Type			
	<ul style="list-style-type: none"> O - Outdoor P - Packaged A - Air Cooled 			Divide by 10 to get approx. nominal Capacity in kilowatts			<ul style="list-style-type: none"> R - Reverse cycle K - Refrigerant R410A T - Three phase power supply B - Twin compressor system (twin circuit) H - Horizontal discharge supply air fan U - Downward discharge supply air fan Y - EC indoor air fan motor P - EC plug indoor fan motor F - Inverter Compressor 			



Optional SAT Wall Thermostat
for non-digital systems

Materials and specifications subject to change without notice due to the manufacturer's ongoing research and development programme.



visit our website www.temperzone.biz

AUCKLAND

temperzone Ltd
38 Tidal Road, Mangere South,
Manukau 2022.
Private Bag 93303, Otahuhu,
Manukau 1640, N.Z.
Phone 0-9-279 5250
Fax 0-9-275 5637
Email sales@temperzone.co.nz

WELLINGTON

Phone 0-4-569 3262
Fax 0-4-566 6249

CHRISTCHURCH

Phone 0-3-379 3216
Fax 0-3-379 5956

SYDNEY

temperzone australia pty ltd
14 Carnegie Place, Blacktown
NSW 2148
PO Box 8064, Seven Hills West
NSW 2147
Phone (02) 8822 - 5700
Fax (02) 8822 - 5711
Email sales@temperzone.com.au

MELBOURNE

Phone (03) 8769 - 7600
Fax (03) 8769 - 7601

ADELAIDE

Phone (08) 8340 - 0607
Fax (08) 8340 - 2118

PERTH

Phone (08) 9314 - 3844
Fax (08) 9314 - 3855

TOWNSVILLE

Phone (07) 4773 - 9566
Fax (07) 4773 - 9166

BRISBANE

Phone (07) 3308 - 8333
Fax (07) 3308 - 8330

NEWCASTLE

Phone (02) 4962 - 1155
Fax (02) 4961 - 5101

HOBART

Phone (03) 6272 - 0066
Fax (03) 6272 - 0506

SINGAPORE

temperzone Ltd
1 Claymore Drive, #08-13
Rear Block, Orchard Towers
Singapore 229594
Phone SNG 6733 - 4292
Fax SNG 6235 - 7180
Email sales@temperzone.com.sg

