


Performance Data


IMDL 60Y-SPE

Air Handling

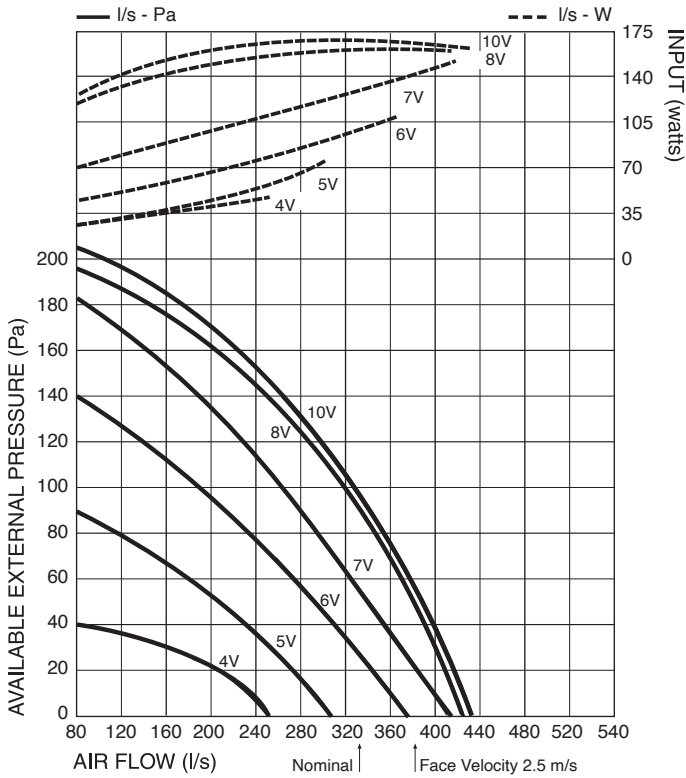

Note: Airflows are for dry coil. Reduce airflow by 10% in high moisture removal conditions. **Air flows given are for IMDL-Y units without filter installed.** Refer to Temperzone for filter pressure drop.

Dimensions

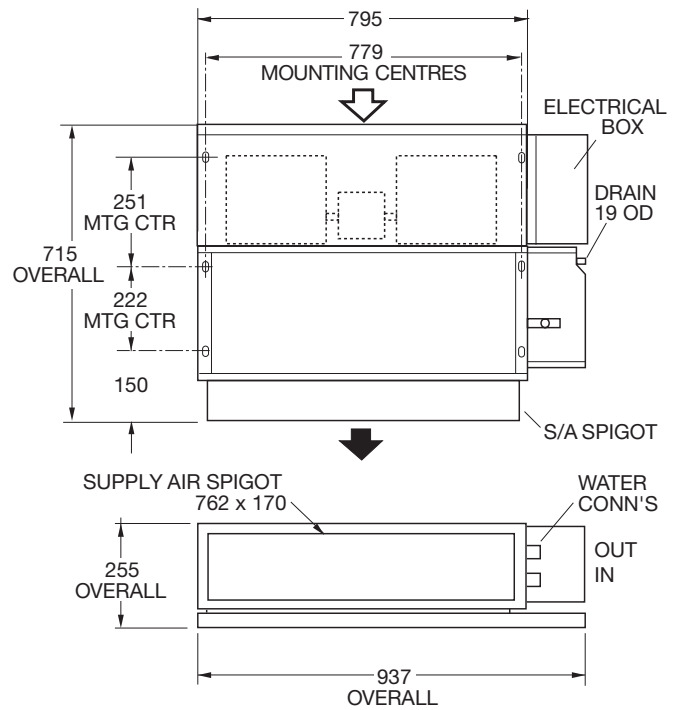

Sound Levels

Return Air Inlet + Case Breakout							
Vdc	Sound Pressure Levels (SPL) (dB)						
	dB(A)	Octave Band Centre Frequency (Hz)					
		125	250	500	1K	2K	4K
10	57	58	59	55	52	48	44
8	57	56	58	55	51	48	43
7	55	54	56	53	49	46	41
6	53	52	54	51	47	43	38
5	50	48	52	48	44	40	34
4	46	46	48	45	40	36	29
3	42	42	44	42	35	32	25
2	35	44	40	32	26	24	18

Supply Air Outlet							
Vdc	Sound Pressure Levels (SPL) (dB)						
	dB(A)	Octave Band Centre Frequency (Hz)					
		125	250	500	1K	2K	4K
10	50	59	55	48	40	35	30
8	47	57	52	45	37	32	27
7	46	56	51	43	35	30	24
6	43	52	48	40	33	26	20
5	39	50	44	37	28	22	15
4	37	47	42	34	24	18	10
3	33	43	40	29	17	10	5
2	33	46	39	25	11	7	4

Sound levels are specified as in-situ conditions. For more information and adjustment factors for your specific installation please find supplementary booklets under the relevant units on our website www.temperzone.com

Materials and specifications are subject to change without notice due to the manufacturer's ongoing research and development programme.