


## Ducted Three Phase Split System Air Conditioner

## Technical Data

---

### ISD 127Q / OSA 127

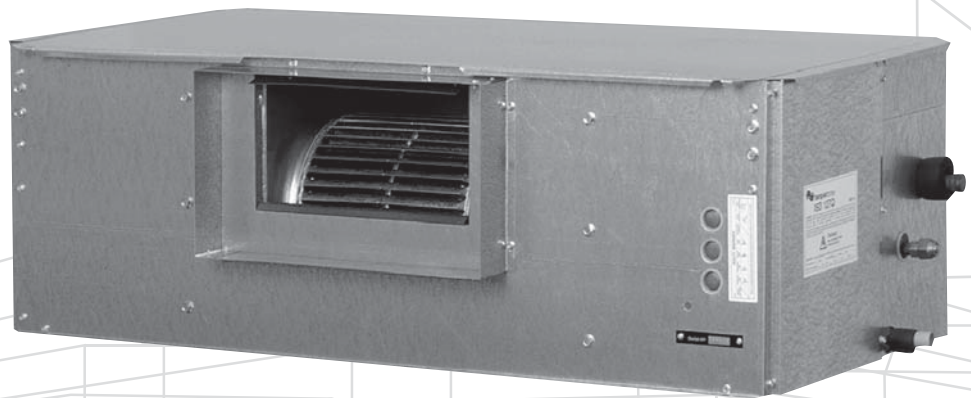

**Optional  
HAN-L6 Controller**

**Extra Long Life  
Epoxy Coated Outdoor Coil**

**Nominal Cooling Capacity  
12.5 kW**

# ISD 127Q / OSA 127 DUCTED THREE PHASE SPLIT SYSTEM AIR CONDITIONER

## GENERAL

**ISD 127Q** - Indoor unit usable for reverse cycle or cooling only

**OSA 127** - A general designation for outdoor unit

**OSA 127C** - Outdoor unit, cooling only version

**OSA 127R** - Outdoor unit, reverse cycle version

The ISD indoor unit, together with its associated OSA outdoor unit, provides a three phase split system air conditioner designed and developed to comply with and exceed AS/NZS 3823 specified conditions (i.e. guaranteed cooling cycle performance at 43°C outdoor temperature).

## APPLICATIONS

These units have been specifically developed for air conditioning of light commercial and residential premises, e.g. offices, motels, shops and homes.

## Air Flow Selection

The nominal indoor air flow and temperature/humidity conditions meet ASHRAE rating standards (incl. 50%RH). If the air returning to the indoor coil is regularly expected to be above 50%RH, then the coil face velocity should be limited to be 2.5 m/s or less (refer Air Flow graph; 2.5 m/s is clearly marked).

High humidity levels can occur in tropical or subtropical conditions, and/or when heavily moisture laden fresh air is introduced.

Consideration must always be given to selecting an air flow and face velocity that avoids water carry-over problems.

Applications using full or high proportions of fresh air should be referred to your nearest **temperzone** sales office to establish the correct selection of units.

## FEATURES

**Efficient.** The outdoor unit incorporates a high efficiency scroll compressor. Heat exchange coils incorporate inner grooved (rifled) tube for better heat transfer.

**Performance.** A dynamically balanced forward curved fan with a multi-speed motor enables fine tuning of the indoor unit to match the supply air requirements. The system includes a temperature sensing head pressure control which enables the system to compensate for outdoor ambient temperatures below 20°C on cooling cycle, and above 15°C on heating cycle.

**Quiet.** The compressor is isolated in a built-in, insulated compartment to minimise noise. The indoor unit is also insulated for noise attenuation.

**Slimline.** The compact up-right design of the outdoor unit requires only a 150 mm gap on the coil side where installation is against a wall. Its slimline cabinet is particularly practical where there is restricted space, e.g. side access pathways, balconies, narrow ledges, etc. The unit is free standing, but can be fitted on a wall using the optional wall mounting brackets.

**Durable.** The outdoor coil fins are epoxy coated for extra protection in corrosive environments, e.g. salt laden sea air. The outdoor unit's cabinet is constructed from high grade galvanised steel - polyester powder coated for all weather protection (IP 45). External fasteners are stainless steel. Heat exchange coils comprise aluminium plate fins on mechanically expanded rifled copper tube. The indoor unit's cabinet is constructed from high grade galvanised steel and also includes a plastic drain tray for complete corrosion resistance.

**Service Access.** The indoor unit's built-in drain tray can be removed for ease of cleaning and service accessibility.

**Insulation.** Closed cell foam insulation has been used in the indoor unit's cabinet to ensure no particles are introduced into the air stream. The insulation is foil faced and meets fire test standards AS 1530.3 (1989) and BS 476 parts 6 & 7.

**Mounting.** The indoor unit can be mounted rigid, or using the optional spring mounting brackets which minimise transfer of vibration.

**Self Diagnostics.** The Outdoor Unit Controller (OUC) has a display of LEDs to indicate faults and running conditions. A general fault indicator is included for interface to external systems.

## OPTIONAL ACCESSORIES

Outdoor Unit:

1. LP switch.
2. Fault indicating auxiliary relay board.
3. Wall mounting brackets.

Indoor Unit:

1. Filter box - integrated return air spigot and washable filter (rated EU2).
2. **temperzone** HAN-L6 Controller.
3. Spring Mounting Kit.
4. 3 kW electric booster heater box - complete with safety cutouts required to meet AS/NZS 3350.2.40 1997.
5. Supply and return air plenums.
6. Safety drain tray.

## SAFETY FEATURES

1. HP and loss of refrigerant protection.
2. Anti-rapid cycle timer and internal overload for compressor protection.
3. Circuit breaker control circuits.
4. Time-and-temperature controlled electronic de-ice switch prevents icing up of the outdoor coil during heating cycle (OSA 127R only).
5. Frost protection on cooling cycle.
6. Sensor fault indication.
7. Crankcase heater prevents liquid refrigerant condensing in the compressors during the 'off' cycle.
8. Compressor minimum run time to ensure oil return.

## COMPRESSOR

Each high efficiency scroll type compressor is hermetically sealed, quiet running and supported on rubber mounts to minimise vibration.

## REFRIGERATION PIPING

The standard unit allows for a line length of up to 30 m.

Max. height separations between units are :  
Reverse Cycle systems:

Outdoor unit above indoor unit : 12 m

Outdoor unit below indoor unit : 12 m.

Cooling Only systems:

Outdoor unit above indoor unit : 18 m

Outdoor unit below indoor unit : 12 m.

For extended line lengths contact your nearest **temperzone** sales office for additional details on piping requirements.

The OSA 127 is shipped from the factory with a charge of HCFC-22 (R22) refrigerant sufficient for a 10 m line length. Liquid and suction service valves are provided. Accurator expansion devices control the flow of refrigerant. The matched indoor unit is shipped with a holding charge of nitrogen. Both units have one flare and one brazed pipe connection.

## WIRING

The electrical supply required (including voltage fluctuation limits) is: 3 phase 342-436 V a.c. 50 Hz with neutral and earth. The compressor crankcase heater requires a 24 hour power supply. A control panel, located in the outdoor unit, is fully wired ready to accept the main power supply.


**Note:** A single phase version of this system, i.e. ISD 127Q/OSA 126 is also available.

## AIR HANDLING

**Note:** In a free blow application, beware of exceeding indoor fan motor's full load amp limit.

As filters are optional, the fan air flows given are for units installed without filters.


The manufacturer operates a quality management system that conforms to AS/NZS ISO 9001:2000.

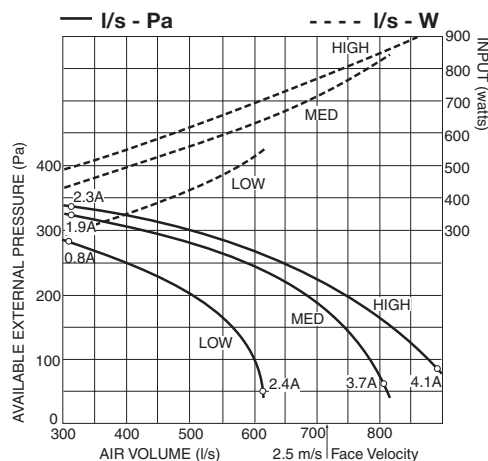

## ELECTRICAL

E.E.R. (cooling)	2.66
Indoor Fan Full Load Amps	5 A
Running Amps (Total System)	9.3 / 6 / 6
Recommended External Fuse	25 A

## FILTER PRESSURE DROP

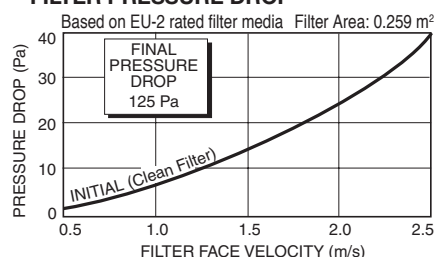

## PERFORMANCE DATA

## COOLING CAPACITY (kW)

Total = Total Capacity (kW)      Sens. = Sensible Capacity (kW)

E.A.T. = Entering Air Temperature      ○ = Nominal Capacity (kW)

**Note:** Capacities are **gross** and do not include allowance for fan motor heat loss. Capacities are for close coupled systems. Interconnecting pipework will reduce capacity.

MODELS Indoor / Outdoor Unit / Unit	INDOOR FAN		INDOOR COIL E.A.T.		OUTDOOR COIL ENTERING AIR TEMPERATURE °C D.B.											
	SPEED	AIR l/s	W.B. °C	D.B. °C	23		27		31		35		39		43	
					Total	Sens.	Total	Sens.	Total	Sens.	Total	Sens.	Total	Sens.	Total	Sens.
ISD 127Q / OSA 127	HIGH	750	15	21	12.2	9.4	11.9	9.2	11.6	9.1	11.2	8.9	10.8	8.8	10.4	8.6
			17	23	13.0	9.3	12.6	9.1	12.2	9.0	11.8	8.8	11.4	8.6	11.0	8.5
			19	27	13.7	10.7	13.3	10.5	12.9	10.4	12.5	10.2	12.1	10.0	11.7	9.9
			21	31	14.5	12.0	14.1	11.9	13.7	11.7	13.2	11.6	12.8	11.4	12.4	11.3

### Indoor Air Flow Correction Factors @ nominal conditions

	Indoor Air Flow (%)			
	-20%	-10%	Rated	+10%
Total Capacity	0.95	0.975	1.0	1.025
Sensible Capacity	0.89	0.950	1.0	1.050

## PIPE LENGTH CAPACITY LOSS

ON COOLING CYCLE DUE TO PRESSURE DROP

**Note:** Loss percentage is approximate only.  
No allowance made for vertical piping.

Pipe Size (mm)		Equivalent Line Pipe Length (m)					Additional Pipe Length to allow per Bend		
Liquid	Suction	5	10	15	20	30	Suction Pipe Size OD	19 mm	22 mm
13	19	1.6 %	3.2 %	4.7 %	-	-	Long 90° Radius (2 x pipe dia.)	0.4 m	0.5 m
13	22	0.8 %	1.6 %	2.4 %	3.2 %	4.7 %			

## HEATING CAPACITY (kW)

G = Gross Heating Capacity kW, based on nominal air flow of 750 l/s.

N = Net Heating Capacity kW allowing for average defrost.

○ = Nominal Capacity (kW)

### Reverse Cycle Systems

MODELS Indoor / Outdoor Unit / Unit	INDOOR ENTERING AIR TEMP. °C D.B.	OUTDOOR COIL ENTERING AIR TEMPERATURE (E.A.T.) °C D.B.															
		- 5		- 3		- 1		1		3		5		7		9	
		G	N	G	N	G	N	G	N	G	N	G	N	G	N	G	N
ISD 127Q / OSA 127R	15	8.5	7.7	9.2	8.3	9.9	8.9	10.5	9.3	11.2	9.4	12.0	10.8	12.8	12.6	13.4	13.4
	20	8.4	7.5	9.1	8.2	9.7	8.7	10.3	9.1	10.9	9.2	11.8	10.6	12.5	12.4	13.1	13.1
	25	8.1	7.3	8.7	7.9	9.3	8.4	9.9	8.7	10.5	8.9	11.3	10.2	12.0	11.9	12.6	12.6

## SOUND LEVELS

### Sound Power Levels (SWL)

**Test Conditions:** BS 848 PT2 1985. Installation Type A (free inlet and outlet). Direct method of measurement (reverberant room).  
Measured in decibels re 1 picowatt.

### Indoor Unit - Supply Air Outlet

FAN SPEED	AIR FLOW l/s	SWL dB(A)	OCTAVE BAND FREQUENCY Hz					
			125	250	500	1 k	2 k	4 k
			SOUND POWER LEVELS (SWL) dB					
LOW	535	68	62	64	66	62	59	58
MED	715	75	68	71	71	71	67	66
HIGH	750	77	70	74	73	74	69	68

### Supply Air Outlet + Insulated Duct \*

FAN SPEED	AIR FLOW l/s	SWL dB(A)	OCTAVE BAND FREQUENCY Hz					
			125	250	500	1 k	2 k	4 k
			SOUND POWER LEVELS (SWL) dB					
HIGH	750	66	59	63	62	63	58	57

\* 1 metre of 25 mm insulated duct

### Outdoor Unit

MODEL	FAN SPEED	SWL dB(A)	OCTAVE BAND FREQ. Hz						SPL @ 3 m dB(A)	OCTAVE BAND FREQ. Hz					
			125	250	500	1 k	2 k	4 k		125	250	500	1 k	2 k	4 k
			SOUND POWER LEVELS dB							SOUND PRESSURE LEVELS dB					
OSA 127	MED	67	71	69	65	62	56	48	51	55	53	49	46	40	52
	HIGH	69	70	70	66	65	58	50	53	54	54	50	49	42	54


Sound Pressure Level (SPL) in decibels re 20 µPa.

## DIMENSIONS (mm)

Not to Scale

### ISD 127Q Indoor Unit

Net Weight 45 kg  
Shipping Weight 48 kg

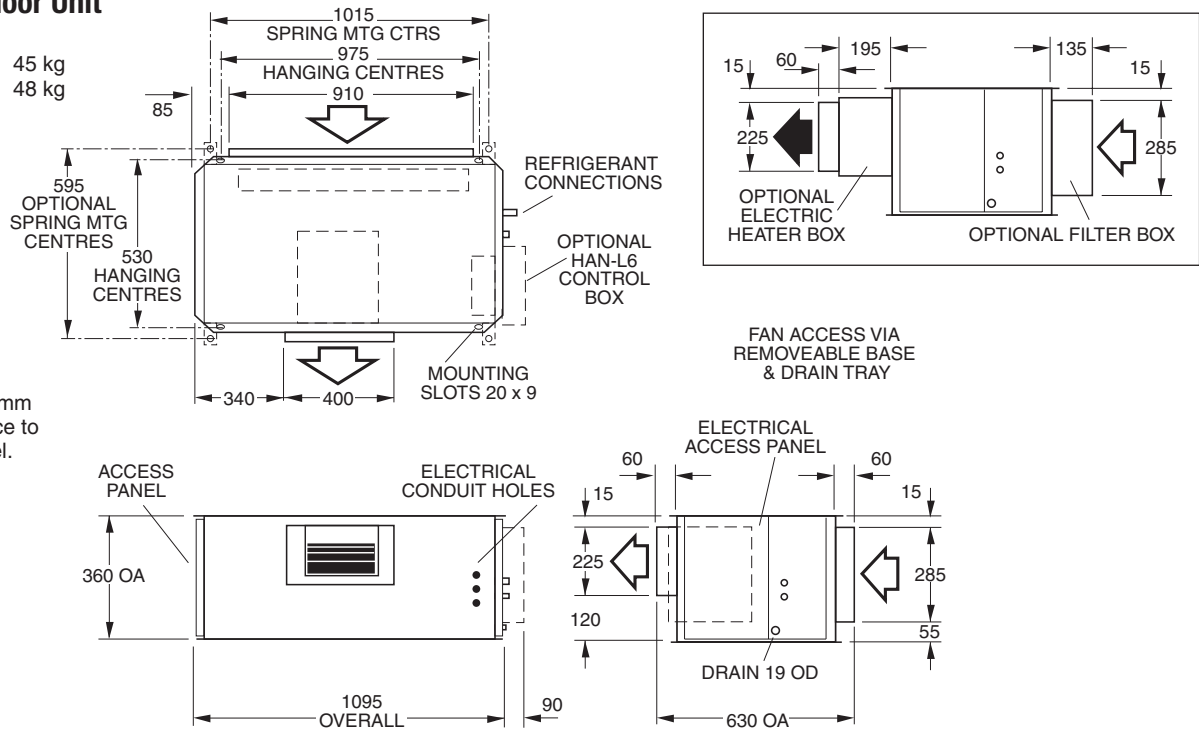


Note : Allow 500 mm minimum clearance to each access panel.

### OSA 127 Outdoor Unit

	<b>OSA 127C</b>	<b>OSA 127R</b>
Net Weight	90 kg	92 kg
Shipping Weight	101 kg	103 kg


#### Note

Materials and specifications are subject to change without notice due to the manufacturer's ongoing research and development programme.

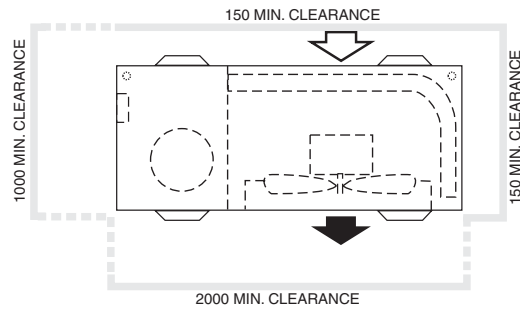

#### Recommended Pipe Line Sizes

Liquid: 13 mm OD,  
Suction: 19 mm OD  
(22 mm above  
15 m line length)

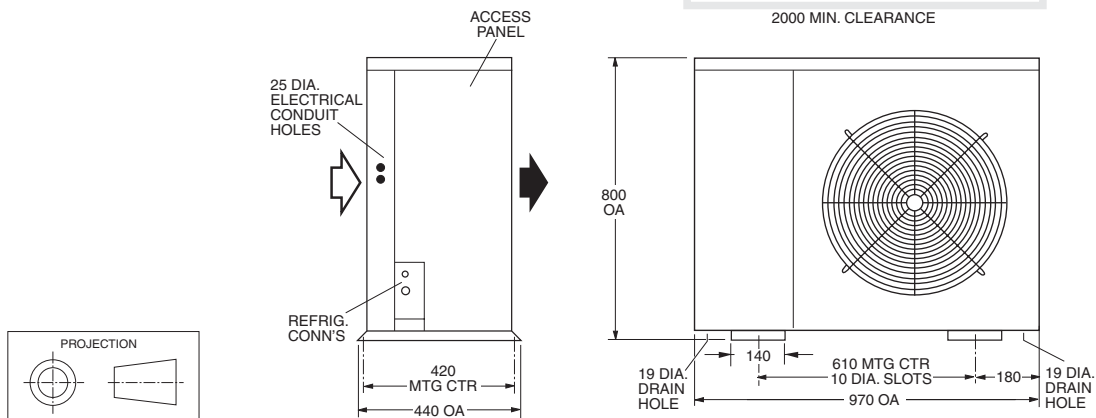

#### temperzone limited

Head Office, Auckland : 38 Tidal Rd, Mangere, N.Z.  
Private Bag 93303, Otahuhu, NEW ZEALAND.  
Email sales@temperzone.co.nz Website: www.temperzone.biz

#### temperzone australia Pty ltd

Head Office, Sydney : 7A Bessemer St  
PO Box 6448, Delivery Centre, Blacktown, NSW 2148,  
AUSTRALIA. Email sales@temperzone.com.au

#### AUCKLAND

Ph. 0-9-279 5250  
Fax 0-9-275 5637

#### WELLINGTON

Ph. 0-4-569 3262  
Fax 0-4-566 6249

#### CHRISTCHURCH

Ph. 0-3-379 3216  
Fax 0-3-379 5956

#### SYDNEY

Ph. (02) 8822-5700  
Fax (02) 8822-5711

#### ADELAIDE

Ph. (08) 8333-1833  
Fax (08) 8333-1844

#### SINGAPORE

Ph. SNG 6733 4292  
Fax SNG 6235 7180

#### MELBOURNE

Ph. (03) 9551-7422  
Fax (03) 9551-8550

#### BRISBANE

Ph. (07) 3399-2544  
Fax (07) 3399-2577

#### NEWCASTLE

Ph. (02) 4962-1155  
Fax (02) 4961-5101



#### PERTH

Ph. (08) 9314-3844  
Fax (08) 9314-3855

#### TOWNSVILLE

Ph. (07) 4773-9566  
Fax (07) 4773-9166

#### HOBART

Ph. (03) 6272-0066  
Fax (03) 6272-0506

Available from