

Premium Zone Control



Installation / Commissioning Tips


These notes are to be read in conjunction with the Installation, Configuration & User Manual supplied

Installation

- Damper Motors to be 24v Drive Open / Drive Closed

- Connection CPU to UC8 Temperzone Units
 - ✓ Ensure Polarity Correct
 - Terminal A1 on UC 8 goes to Terminal A on CPU
 - Terminal B1 on UC8 goes to Terminal B on CPU

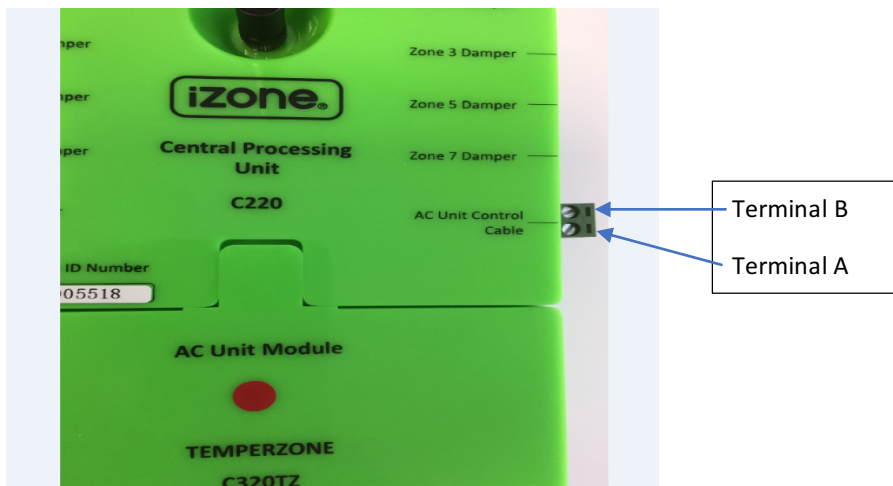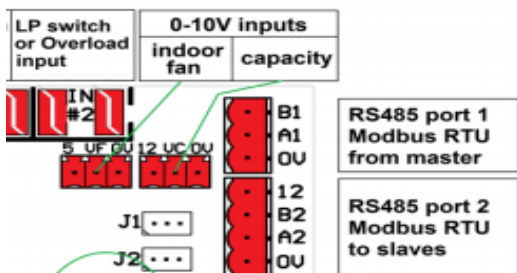

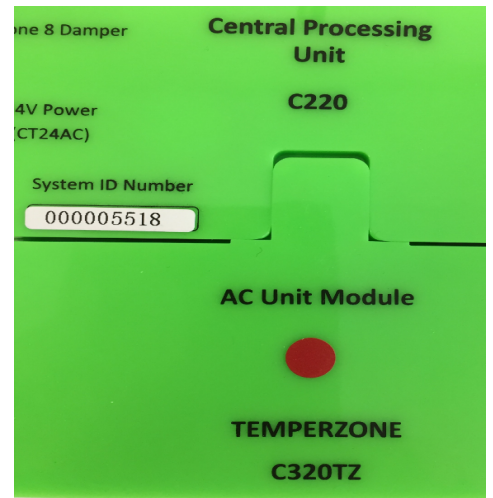

Record the System ID Number

This is required when pairing the CPU to the Wi Fi Bridge during system commissioning

Activating Wi Fi Sensor Battery

Remove the back from the Wi Fi Sensor

Remove the Plastic Protection Tab from Behind Battery



Zone Number Selector

Pairing Switch

Commissioning

System Initialisation

A new or modified system **must** be initialised prior to system configuration



To initialise the system, press the button on the underside of the touch pad, use a pen etc as the button is recessed



Button for initialisation

How to add Installer Details onto the Touch Pad


4.1 iZone 325 home screen

- To get back to the Home screen at any time press. 
- When entering names or values using the keyboard it is easier to use a thin object such as a toothpick. Do not use sharp, hard objects as they may damage the screen. The enter button must always be pressed to save the changes you have made. 
- Some functions may have been locked by your installer to ensure the commissioned values are not changed. To make changes to these values contact your installation company.



On the touch pad, enter System Options, this is found in the System Config. menu

Select Tag Lines to change the information on the display

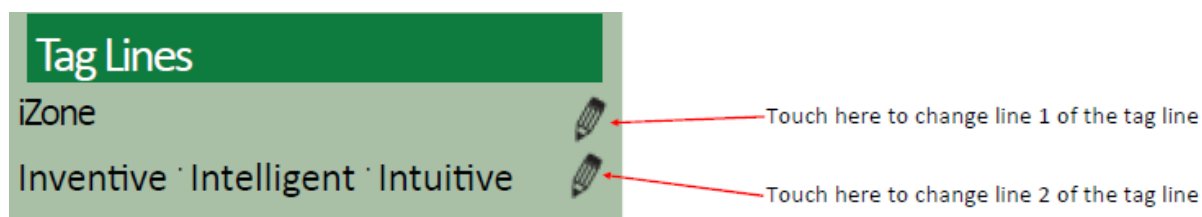

We suggest:

Line 1 Installer Name

Line 2 Contact Phone number

Change details using the same method used to changing Zone Names

Wi Fi Connection

3.5.3 Smart Phone, Tablet or PC configuration - Equipment Required and Configuration

Equipment

- See 1.8 & 1.9 For details of equipment required and wiring diagram.



Configuration

- Power up the WiFi Bridge
- Press the System Config button on the touchscreen
- Enter the system password "wamfud"



Pair the wireless bridge to the iZone system

- Press and hold the blue button on the side of the Bridge. At the same time press the "Pair Wireless Device" button on the touchscreen



- Wait a few seconds. Press the home button on the touch screen.
- The grey WiFi symbol should appear at the bottom of the home screen.



- Connect the RJ 45 cable from the Bridge to the modem / router. The symbol will change to 100% green.



If this symbol is Grey, the Wi Fi Bridge is connected to the Premium Control System, but is not connected to the local computer network